



Model 4610HD

Extra Bright 46" LCD Screen, Full HD

All-weather exterior protects internal components from rain, dirt, insects and scratches

Quad-fan airflow system keeps unit cool and dry in temperatures up to 122 degrees F.

Internal thermostatically-controlled heater protects TV in temperatures as low as -24 degrees F.

Innovative watertight cable entry system with pass-through design keeps cables dry and allows for easy hook-ups

Detachable speaker module can be removed when the TV is integrated with external speakers

Water-resistant remote control

Optional wall and ceiling mounts are weatherized and include stainless steel hardware

Model 4610HD

Shown without detachable speaker module


Specifications

| | |
|---|--|
| LCD Screen | 46-inch diagonal TFT Active Matrix |
| Resolution | HD 1920 x 1080 Full HD 1080p |
| Aspect Ratio | 16:9 |
| Contrast Ratio | 2000:1 |
| Viewing Angle | 178° |
| Response Time | 6 milliseconds |
| TV formats | 1080p, 1080i, 720p, 480p, 480i |
| Input Connectors: | |
| RF | Antenna/CATV (ATSC/QAM/NTSC) x1 |
| HDMI | HDMI™ Input x2 |
| Video Composite | S-Video x1 and Composite Video x1, L/R Audio Inputs x1 |
| Video Component | YPbPr plus Stereo Audio x2 |
| PC | 15-pin D-sub VGA plus Stereo Audio |
| RS232 Serial | Full-featured command set with discrete on/off, input select and volume control |
| Discrete IR Control | Codes for Power On/Off and Input Select |
| Input Power | 100-240 VAC, 50-60 Hz 4.0 A Max |
| Audio | 10-watt x 2 channels, water-resistant speaker module (detachable); SPDIF Audio output |
| Operating Temp. | -24° to 122° F. (-31° to 50° C.) * |
| Non-op. Temp. (Off-mode with power applied) | -24° to 140° F. (-31° to 60° C.) The non-operating temperature feature requires power to be applied |
| Accessories Included | Water-resistant remote control with lithium battery |
| TV Dimensions | 44.72" W x 27.16" H (30.47" H with speakers) x 6.85" D |
| Weight | 82.7 lbs; 86.8 lbs with speakers |
| Warranty | One-year, in-factory, parts and labor |

Specifications are subject to change.

*Temperature range is for operation in shaded location.

Patent pending. All rights reserved. (C) 2008 SunbriteTV LLC

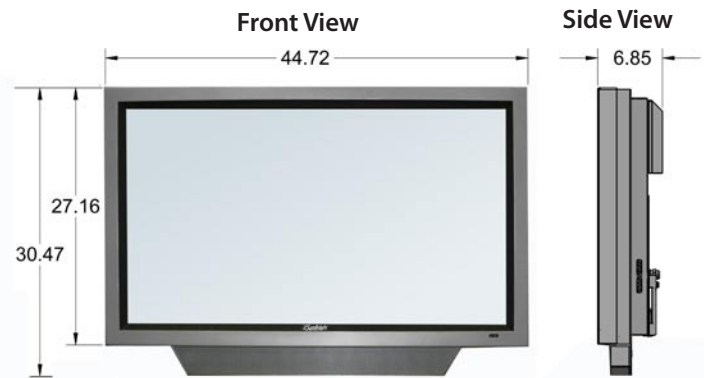

Dimensions with detachable speaker module. All measurements are in inches

Optional Accessories

| | |
|------------|---|
| SB-WM46 | Articulating wall mount with tilt and swivel, arm and pan. Dual arm articulation extends to 21". Customized to fit--includes stainless steel and/or zinc-plated hardware. |
| SB-WM46NA | Wall mount with tilt--non articulating. Customized to fit--includes stainless steel and/or zinc-plated hardware. |
| SB-CM46A12 | Ceiling mount with tilt and swivel. Includes adjustable extension column provides up to 6" above unit to ceiling in above unit to ceiling in 1" increments without disassembly, and 4" x 4" designer ceiling plate. Meets VESA standards. |
| SB-DP46XA | Deck/Planter pole (Requires purchase of wall mount SB-WM46 or SB-WM46NA). Special order item. |
| SB-FMT32 | RadioFM™, transmits audio from TV to FM radio |
| SB-TS46C | Removable table top stand. TV with table top stand is 30.58" H x 11.70"D; 9.5 lbs. |
| SB-DC461 | Outdoor TV dust cover |



Authorized SunbriteTV dealer

Decksidediversion | P.O. Box 634 | Bedford, PA 15522

toll free 866-779-5175 mobile 814-977-3023

email tcaddy@decksidediversion.com

www.decksidediversion.com